

USER'S MANUAL

LED Beam 12x12W RGBW Moving Head Lighting



Maintenance

1.Please keep the light in dryness and avoiding use in wet place.

2.Using intermittenlly can be extended the life.

3.Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.

4.Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory,All of the user should comply with above warning item and manual ,any misuse cause of the damages are not included in our guarantee,and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1.For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.

2.Please don't lay the product on the un-fixable or shakable place.

3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.

HTTP://WWW.SHEHDS.COM/

4.Power supply should not be changed over +&-10% while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.

5.After power off, if it is need used again, please cool down over 20 minuter.

6.Please look round the manual for ensure the product can be used normally.

Channel	Value	Function	
CH1	0-255	X axis rotation	
CH2	0-255	Y axis rotation	
CH3	0-255	Total light adjustment	
CH4	0-255	Red Dimmer	
CH5	0-255	Green Dimmer	
CH6	0-255	Blue Dimmer	
CH7	0-255	White Dimmer	
CH8	0-255	Strobe	
CH9	0-255	XYaxis rotation speed adjustment	

DMX Channel Summary-9 Channels Mode

DMX Channel Summary-16 Channels Mode

Channel	Value	Function	
CH1	0-255	X axis rotation	
CH2	0-255	Y axis rotation	
CH3	0-255	Total light adjustment	
CH4	0-255	Red Dimmer	
CH5	0-255	Green Dimmer	
CH6	0-255	Blue Dimmer	
CH7	0-255	White Dimmer	
CH8	0-255	Strobe	
CH9	0-255	XY speed adjustment	
CH10	8-230 color combination change		
	231-255	Color jump Auto run mode	
	201 200	Color gradient Auto run mode 1	
		Color gradient Auto run mode 2	
CH11	0-255	Color Auto run mode speed adjustment	
CH12	0-255	Default mode 1	
CH13	150-200	Default mode speed adjustment	
CH14	0-255	X-axis fine-tuning	

HTTP://WWW.SHEHDS.COM/


CH15	0-255	Y-axis fine-tuning
CH16	150-200	Reset

Display Control Instruction

DMX SET	001-512	512 ADDRESS SETTINGS			
Channel Set	9	9 channel control			
	16	16 channel control			
Show Mode	Dmx Mode	Console mode			
	Fast Mode	Fast run mode			
	Slow Mode	Slow run mode			
	Sound Mode	Sound run mode			
Sound Sense	0-99	Sound Sensitivity regulatory			
Pan Inverse	OFF	X motor Positive direction			
	ON	X motor Positive direction			
Tite Inverse	OFF	Y motor Positive direction			
	ON	Y motor Positive direction			
While balance	R 0-255	Red adjustment			
	G 0-255	green adjustment			
	B 0-255	blue adjustment			
	W 0-255	White adjustment			
Default confirm	Yes	Initialization factory			
Fixture REST	YES	System Reset			

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

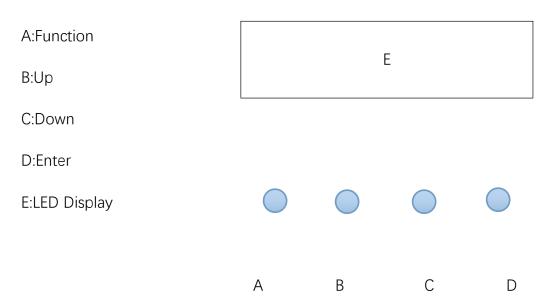

Instructions:Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function(see menu).The last two digits represent the functions in which the address code or speed parameters.Press the B or C key to modify the parameter values.Press the D key to confirm.

Product Introduction

- * Power Supply:AC90--240V,50--60HZ
- * Power consumption:144W
- * Fixing lamp:LED 12×12W
- * DMX-Control-channels:9/16 DMX Channels
- * Flash rate:0--10HZ
- * Dimmer:0-100% mechanic dimmer
- * Long Lifespan LEDs(more than 60,000 hours)
- * Product Size: 25*15*31 cm
- * Product weight: 4.6 kg
- * Package Size: 31*20*36 cm
- * Package weight: 5.05 kg