



Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

# USER'S MANUAL



## Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

## Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

## Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.

3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over  $\pm 10\%$  while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.
5. After power off, if it is need used again, please cool down over 20 minutes.
6. Please look round the manual for ensure the product can be used normally.

### DMX Channel Summary-11 Channels Mode

Channel	Value	Function
CH1	0-255	X-axis, move
CH2	0-255	Y-axis, move
CH3	0-127 128-191 192-255 0-255	Position offset Positive rotation Reverse rotation ZOOM
CH4	0-255	Total dimmer, linear dimming-Dark to Bright
CH5	0-255	Red light color control, channel value of 0 for the closed light, 1~255 for the red light adjustment
CH6	0-255	Green color control, channel value of 0 for the closed light, 1~255 for the green light adjustment
CH7	0-255	Blue light color control, channel value of 0 for closed light, 1~255 for blue light adjustment
CH8	0-255	White light color control, the channel value of 0 for the closed light, 1~255 for the blue light adjustment
CH9	0-255	Strobe, Slow to Fast
CH10	11-95 96-174 175-255	Preset color Mode Auto Run Mode Voice Control Mode
CH11	0-255	Mode (CH13) Speed adjustment

### DMX Channel Summary-14 Channels Mode

Channel	Value	Function
CH1	0-255	X-axis, move
CH2	0-255	X-axis fine-tuning
CH3	0-255	Y-axis, move
CH4	0-255	Y-axis fine-tuning
CH5	0-255	XY-axis speed adjustment
CH6	0-127 128-191	Position offset Positive rotation

	192-255 0-255	Reverse rotation ZOOM
CH7	0-255	Total dimmer, linear dimming-Dark to Bright
CH8	0-255	Red light color control, channel value of 0 for the closed light, 1~255 for the red light adjustment
CH9	0-255	Green color control, channel value of 0 for the closed light, 1~255 for the green light adjustment
CH10	0-255	Blue light color control, channel value of 0 for closed light, 1~255 for blue light adjustment
CH11	0-255	White light color control, the channel value of 0 for the closed light, 1~255 for the blue light adjustment
CH12	0-255	Strobe, Slow to Fast
CH13	11-95 96-174 175-255	Preset color Mode Auto Run Mode Voice Control Mode
CH14	0-255	Mode (CH13) Speed adjustment


## Display Control Instruction

No	Display	Function
1.	DMX Set Address	001-512
2.	Show Mode	DMXMode Sond Mode SlowMode FastMode
3.	Channel set	DMX mode Channel 14/11 option
4.	Sound Sense	00-99
5.	Pan Inverse	On/Off
6.	Tilt Inverse	On/Off
7.	White Balance	Red 0-255 Green 0-255 Blue 0-255 White 0-255
8.	Defaults Confimrm	Yes
9.	Fixture Rest	Yes

---

## Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

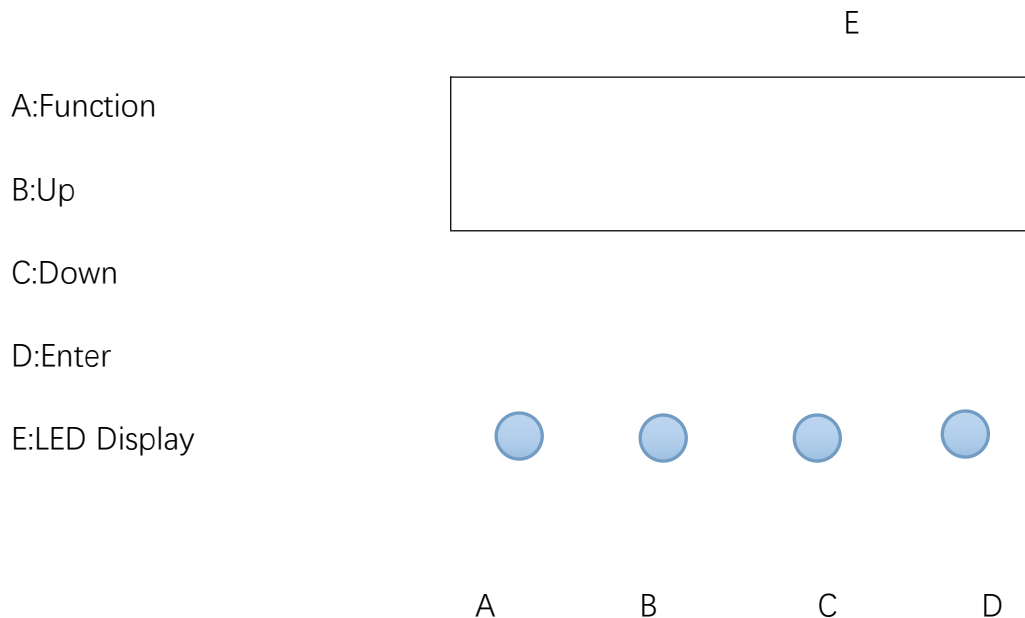

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

## Product Introduction

- \* Power Supply: AC90--275V, 50--60HZ
- \* Power consumption: 90W
- \* Fixing lamp: LED 6×15W RGBW
- \* DMX-Control-channels: 11/14 DMX Channels
- \* Shuttle: Flash rate: 0--10HZ
- \* Dimmer: 0-100% mechanic dimmer
- \* Long Lifespan LEDs (more than 60,000 hours)