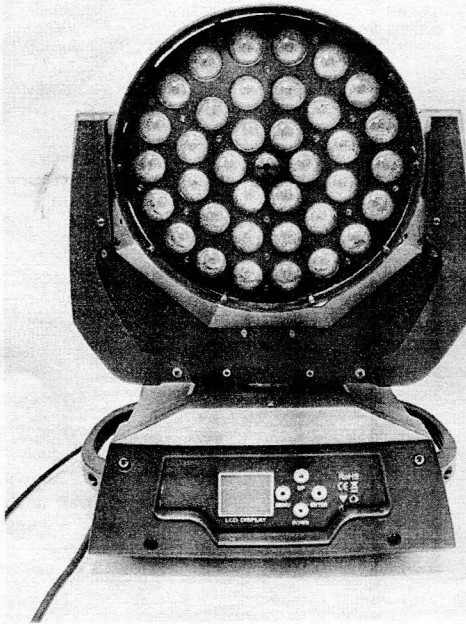

36X18W Moving Head Light



1. Display Menu:

NO.	Display /EN	Display/中文	Detail
1	Menu	菜单	1. reverse 2. sound control sensitivity 3. no signal mode 4. reset 5. restore default. 6. factory setting
2	Addr	地址	change address
3	Disp	显示	Change display mode
4	En/Ch	中英	Language switching
5	Mode	模式	DMX512/auto-fast/auto-slow/sound mode
6	CH	通道	30/18 channel

2. DMX channel:

30 channel:

CH	Function	Value	Detail
1	X	0-255	0~540 degrees
2	Y	0-255	0~270 degrees
3	Zoom	0-255	/
4	Dimmer	0-255	From dark to light
5	R1 dimmer	0-255	Red 1
6	G1 dimmer	0-255	Green 1
7	B1 dimmer	0-255	Blue 1
8	W1 dimmer	0-255	White 1
9	Y1 dimmer	0-255	Yellow 1
10	P1 dimmer	0-255	Violet 1
11	R2 dimmer	0-255	Red 2
12	G2 dimmer	0-255	Green 2
13	B2 dimmer	0-255	Blue 2
14	W2 dimmer	0-255	White 2

15	Y2 dimmer	0-255	Yellow 2
16	P2 dimmer	0-255	Violet 2
17	R3 dimmer	0-255	Red 3
18	G3 dimmer	0-255	Green 3
19	B3 dimmer	0-255	Blue 3
20	W3 dimmer	0-255	White 3
21	Y3 dimmer	0-255	Yellow 3
22	P3 dimmer	0-255	Violet 3
23	Strobe	10-255	/
24	Show	0-24	Internal program 1
		25-49	Internal program 2
		50-74	Internal program 3
		75-99	Internal program 4
		100-124	Internal program 5
		125-149	Internal program 6
		150-174	Internal program 7
		175-199	Internal program 8
		200-224	Internal program 9
225-255	Internal program 10		
25	Speed	0-255	From fast to slow
26	Macro function	0-49	/
		50-99	Lighting effect display)
		100-149	Auto 1
		150-199	Auto 2
		200-255	Sound control
27	X fine	0-255	16bit
28	Y fine	0-255	16bit
29	XY speed	0-255	speed, from fast to slow
30	Reset	0-250	/
		251-255	Reset (3s)

18 channel:

CH	Function	Value	Detail
1	X	0-255	0~540 degrees
2	Y	0-255	0~270 degrees
3	Zoom	0-255	/
4	Dimmer	0-255	From dark to light

5	R dimmer	0-255	Red
6	G dimmer	0-255	Green
7	B dimmer	0-255	Blue
8	W dimmer	0-255	white
9	Y dimmer	0-255	Yellow
10	P dimmer	0-255	Violet
11	Strobe	10-255	
12	Show	0-24	Internal program 1
		25-49	Internal program 2
		50-74	Internal program 3
		75-99	Internal program 4
		100-124	Internal program 5
		125-149	Internal program 6
		150-174	Internal program 7
		175-199	Internal program 8
		200-224	Internal program 9
		225-255	Internal program 10
13	Speed	0-255	From fast to slow
14	Macro function	0-49	/
		50-99	Lighting effect display)
		100-149	Auto 1
		150-199	Auto 2
		200-255	Sound control
15	X fine	0-255	16bit
16	Y fine	0-255	16bit
17	XY speed	0-255	speed, from fast to slow
18	Reset	0-250	/
		251-255	Reset (3s)