


Moving Head Led Spider 8x15W 4in1 RGBW Light

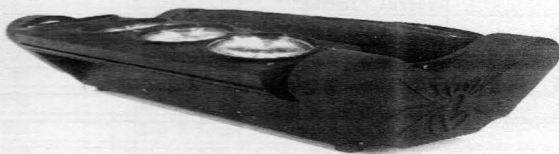

Addr	A001-A512	512 Address setting
CHnd	43CH	43 Channel setting
	13CH	13 Channel setting
Mast	SL 1	Console mode
	SL 2	Auxiliary mode
	Auto	Main machine self-propelled mode
	Soun	Host voice control mode
SHnd	SH 0	Effect 0 (recommended)
	SH 1	Effect 1
	SH 2	Effect 2
	SH 3	Effect 3
Sped	0-255	Speed regulation of self-propelled mode
SEnS	0-99	Voice control sensitivity volume adjustment
bLAnd	bLAc	Zero without 512 signal
	Auto	Self-running without 512 signal
	Soun	No 512 signal voice control
	HoLd	No 512 signal keeps the last console state
LEd	OFF	Off screen after 30 seconds
	ON	The screen is always on
dISP	no	Show Reverse
	YES	Show Forward
TiL1	no	Y1 motor forward rotation
	YES	Y1 motor reverse
TiL2	no	Y2 motor forward rotation
	YES	Y2 motor reverse
REST	YES	System reset
LOAD	YES	Restore factory settings

13 Channel mode

channel	data	description
1	0-255	Y1 motor running
2	0-255	Y2 motor running
3	0-255	Motor speed
4	0-255	General dimming
5	0-255	Red 1-8 General dimming
6	0-255	Green 1-8 General dimming
7	0-255	Blue 1-8 General Dimming
8	0-255	White 1-8 general dimming
9	0	stroboscopic
	1-250	stroboscopic
	251-255	stroboscopic
10	0	Dimming channel action
	1-7	Gradient effect
	8-140	Light moving effect
	141-255	Sound hole walking light effect
11	0-15	Other channel action
	15-128	Self-walking effect
	129-255	Voice-controlled effect
12	0-255	Control the speed and sensitivity of 6 7
13	250-255	Reset (stop for 3 seconds)

43-channel mode

channel	data	description
1	0-255	Y1 motor running
2	0-255	Fine tuning of Y1 motor
3	0-255	Y2 motor running
4	0-255	Fine tuning of Y2 motor
5	0-255	Motor speed
6	0-255	General dimming
7	0-255	Red 1 Total dimming
8	0-255	Green 1 Total dimming
9	0-255	Blue 1 Total dimming
10	0-255	White 1 Total dimming
11	0-255	Red 2 Total dimming
12	0-255	Green 2 Total dimming
13	0-255	Blue 2 Total dimming
14	0-255	White 2 total dimming
15	0-255	Red 3 Total dimming
16	0-255	Green 3 Total dimming
17	0-255	Blue 3 Total dimming
18	0-255	White 3 Total dimming
19	0-255	Red 4 Total dimming
20	0-255	Green 4 Total dimming